

ENDURANCE GOLD CORPORATION Suite 1900 – 1055 West Hastings Street Vancouver, B.C. V6E 2E9

Tel: (604) 682-2707 Fax: (604) 681-0902

<u>NEWS RELEASE 23 - 11</u> August 3, 2023

ENDURANCE EXTENDS EAGLE ZONE BY 180 M TO DEPTH DEEPER INTERSECTIONS INCLUDE 15.68 GPT GOLD OVER 2.8 M & 7.91 GPT GOLD OVER 3.7 M

Endurance Gold Corporation (EDG – TSX.V; ENDGF – OTC Pink; 3EG – Berlin Open Market) (the "Company") is pleased to provide an update on the ongoing exploration program at its Reliance Gold Project (the "Property"). Assay results are reported herein for four of the deepest holes drilled to date in the Eagle Zone. The Property is road accessible and located 4 kilometres ("km") east of the village of Gold Bridge, and 10 km north of the historic Bralorne-Pioneer Gold Mining Camp which has produced over 4 million ounces of gold.

Assay results reported in Table 1 are from the first four Eagle Zone drill holes completed in 2023. Highlight intersections are shown on the <u>longitudinal section on Figure 1</u>. This 2023 Eagle Zone drilling is testing for down-dip extensions of mineralization in the footwall of the Royal Shear fault that is blind to surface. Three of the four drill holes reported herein have intersected significant gold mineralization. Highlights include:

- **DDH23-069** drilled at -45 degrees returned **four intersections**. The most significant intersection was **15.68 gpt gold over 2.8 metres** ("m") **including 51.9 gpt gold over 0.5** m commencing at 168.6 m downhole depth.
- **DDH23-070** drilled at -45 degrees returned **six intersections** commencing at 194 m downhole depth. The most significant intersection was **7.91 gpt gold over 3.7 m including 11.73 gpt gold over 1.2 m**. Mineralization was intersected to a downhole depth of 284 m which is one of the **deepest confirmed intersections** to date at the Eagle Zone.
- DDH23-067 drilled at -45 degrees returned two intersections of 1.15 gpt gold over 19.8 m and 3.0 gpt gold over 11.2 m, commencing at 126.2 m and 190.7 m downhole, respectively.

Drilling has now been conducted at the Diplomat, Imperial and Eagle Zones with **fourteen (14) holes completed in 2023 for over 4,000 m** of the ongoing 15,000 m program.

We are pleased to see the Eagle Zone expand at depth as we continue to probe for blind mineralization in the footwall of the Royal Shear fault. The success of this initial drilling continues to demonstrate the strength of the Eagle Zone system. We look forward to continued expansion with the current planned drill program." stated Robert T. Boyd CEO of Endurance Gold Corporation,

Recent drilling demonstrates that the **Eagle Zone** mineralization continues to significant depth, and remains open to extension at depth and along strike. The four reported drillholes successfully intersected Eagle Zone mineralization along a 150 m strike length and extended the down-dip plunge of Eagle by approximately 180 m. Preliminary results from these deeper drillholes indicate that two dominant mineralized structures exist down-dip of the Eagle Zone. Ongoing drilling is testing the importance and continuity of these two structures which appear to be sub-parallel and

separated by 60 to 80 m. Drilling also continues to intersect wide zones of quartz veining with mineralized cataclastite breccias along the margins of these veins.

Since 2021, the Company has completed 70 diamond drill holes on the Reliance Property with 47 of these drill holes returning significant intersections of greater than 3 m width with grades exceeding 3.4 gpt gold, and fourteen (14) of these drill holes with excellent intersections as summarized on Table 2.

Forest Fire Update

A forest fire near the Company's crew house near Gun Lake has resulted in the required evacuation of drill crews and other residents from the area on August 1st. As a result, drilling has been temporarily suspended at the project site, which is not subject to the evacuation order. Core samples have been submitted and assay results are pending. Drilling is expected to resume when the evacuation order is lifted and when it is deemed safe to return to work.

Endurance Gold Corporation is a company focused on the acquisition, exploration and development of highly prospective North American mineral properties with the potential to develop world-class deposits.

ENDURANCE GOLD CORPORATION

Robert T. Boyd, President & CEO

FOR FURTHER INFORMATION, PLEASE CONTACT

Endurance Gold Corporation www.endurancegold.com
Toll Free: (877) 624 2237, info@endurancegold.com

Diamond drill core was logged and evaluated on the Property and samples designated for collection under the supervision of a geologist at the property. Drilling was completed with HQ & NQ size tools capable of collecting 4.76 centimetre diameter core. NQ drill core was cut using a diamond saw with one half of the core sent for analysis and the remaining kept for future studies. All drill core samples have been submitted to ALS Global in North Vancouver, BC, an ISO/IEC 17025:2017 accredited laboratory, where they are crushed to 70% <2 mm then up to 250 gram pulverized to <75 microns. Samples are then submitted for four-acid digestion and analyzed for 48 element ICP-MS (ME-MS61) and gold 30g FA ICP-AES finish (AU-ICP21). Over limit samples returning greater than 10 parts per million ("ppm") gold are re-analyzed by Au-GRA21 methodology and over limit antimony returning greater than 10,000 ppm Sb are re-analyzed by Sb-AA08 methodology. Endurance Gold monitors QA/QC by inserting blanks, certified standards and pulp duplicates into the sample stream. The work program is supervised by Darren O'Brien, P.Geo., Vice President Exploration for the Company and the qualified person as defined in National Instrument 43-101. Mr. O'Brien has reviewed and approved this news release.

Neither the TSX Venture Exchange nor its Regulation Services Provider (as that term is defined in the policies of the TSX Venture Exchange) accepts responsibility for the adequacy or accuracy of this news release. This news release may contain forward looking statements based on assumptions and judgments of management regarding future events or results that may prove to be inaccurate as a result of factors beyond its control, and actual results may differ materially from the expected results.

Figure 1 - Reliance 2023 Royal Shear Longitudinal

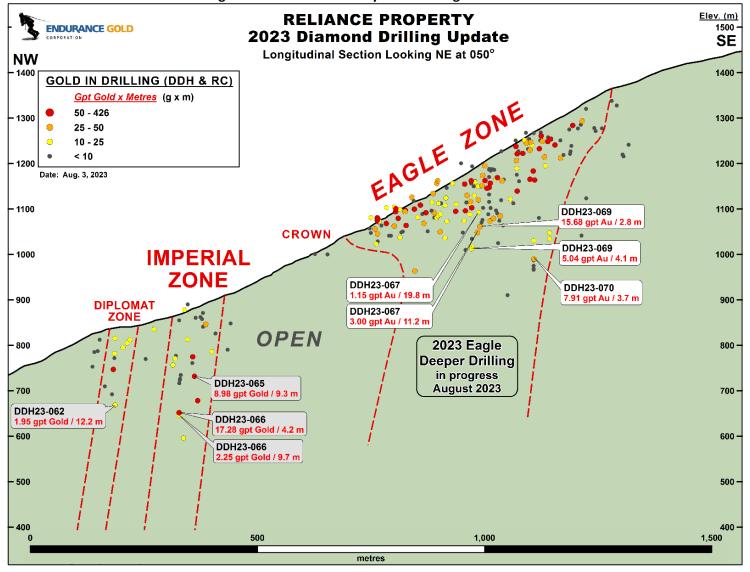


Table 1 – 2023 Reliance Diamond Drill Hole Results – August 3 2023

Table 1 - 2023 Reliance Drill Hole Results - August 3, 2023

HoleID	Dip	From	To	Width (m)	Gold (gpt)
					101

EAGLE ZONE						
DDH23-067	-45	126.2	146.0	19.8	1.15	
includes		135.1	146.0	11.0	1.59	
and		190.7	201.9	11.2	3.00	
includes		192.7	199.5	6.8	3.81	
DDH23-068	-45	131.7	135.7	4.1	1.02	
and		145.2	148.7	3.6	0.74	
and		214.3	216.0	1.8	1.21	
DDH23-069	-45	149.7	150.7	1.0	6.09	
includes		150.2	150.7	0.5	9.99	
and		155.3	159.6	4.3	2.16	
includes		155.3	157.5	2.3	3.54	
and		168.6	171.4	2.8	15.68	
includes		168.6	169.1	0.5	51.90	
and		235.5	239.6	4.1	5.04	
includes		236.5	237.5	1.0	7.86	
DDH23-070	-45	194.0	200.9	6.9	1.79	
in <mark>clud</mark> es		196.8	198.4	1.5	3.51	
and		250.6	254.3	3.7	7.91	
includes		251.2	252.4	1.2	11.73	
includes		253.0	254.3	1.3	10.75	
and		256.4	257.3	0.9	5.94	
and		272.6	273.1	0.5	4.66	
and		281.3	281.7	0.4	3.17	
and		284.0	285.0	0.9	6.94	
DDH23-072	-45	results pending				
DDH23-073	-75	results pending				
DDH23-074	-45	results pending				
DDH23-075	-45	drilling in progress				

CROWN AREA

DDH23-071 -45	results pending	
---------------	-----------------	--

Table 2 – Highlight of the Excellent 2021 to 2023 Diamond Drill Results

Table 2 - BEST 2021 to 2023 Reliance DDH Results

HoleID	From	To	Width (m)	Gold (gpt)
DDH21-004	1.0	20.0	19.0	4.44
DDH21-006	25.6	50.0	24.4	8.62
DDH21-009	161.0	185.9	24.9	8.47
DDH21-020	33.3	58.1	24.8	15.70
DDH22-024	27.0	39.0	12.0	8.41
DDH22-026	80.4	93.9	13.5	8.06
DDH22-027	109.2	139.2	30.0	4.16
and	150.2	154.5	4.3	16.66
DDH22-028	97.0	128.6	31.6	2.59
DDH22-031	124.9	136.8	11.9	7.58
DDH22-036	35.4	48.1	12.7	7.65
DDH22-045	35.1	46.7	11.6	7.31
DDH22-058	32.1	171.9	139.9	3.05
DDH23-065	212.8	222.0	9.3	8.98
DDH23-066	306.5	310.7	4.2	17.28